International Journal of Golf Science, 2013, 2, 54-64
© 2013 Human Kinetics, Inc.

INTERNATIONAL JOURNAL OF
GOLF SCIENCE
Official Journal of WSCG
www.IJGS-Journal.com
ARTICLE

The 2010 Regulations on Golf Club Groove Design: Impact on Ball Flight Characteristics During a Controlled Shot

Paul Burnham, Mick Wilkinson, and Stuart Goodall
Northumbria University

The purpose of this study was to investigate the difference in the amount of spin that can be generated during a controlled golf shot, as a result of the 2010 rule change regarding restrictions applied to the design of the grooves on the clubface implemented by the United States Golf Association and the Royal & Ancient Golf Club. Ten experienced golfers (mean ± *SD*; age, 23.0 ± 0.67 yr; playing experience, 13.2 ± 1.6 yr; handicap, 1.6 ± 1.4) were required to play a total of 120 shots inside a state of the art golf simulator with 3 clubs consisting of "old" pre 2010 U-groove design and "new" post 2010 V-groove design. With the U and V grooved clubs, participants played 10 shots from a fairway mat and 10 shots from a rough mat using a 9 iron, PW and SW. Backspin (RPM) and, as a measure of accuracy, distance landed from the pin (yds) were recorded. Compared with the U-grooves, the newer V-groove design imparted significantly less backspin from both the fairway and rough surfaces ($p < .05$), additionally, shots with all clubs were consistently further away from the pin ($p < .05$). The newer groove design does not enable players to impart as much backspin on the ball as they previously could and our data suggest that the recent change in golf club design might therefore reward driving accuracy.

Keywords: accuracy, backspin, clubface, grooves

On January 1st, 2010 the United States Golf Association (USGA), in association with the Royal & Ancient Golf Club (R&A), implemented changes to the way in which golf club grooves are designed. The intention of the rule change was to remove a player's ability to generate as much spin out of the rough as can be created on the fairway. This was achieved by changing the size and sharpness of the previous large, deep and sharp edged U-grooves into shallower, smaller and round-edged V-grooves (USGA & R&A, 2006). It was anticipated that this change to the grooves would produce less spin in the rough, and as a result, not allow players to achieve as good a shot as they might have had they landed on the fairway. Officials hoped this would promote accuracy from the tee and be a form of punishment for those who do not find fairways. Thus, the intention of this rule change was to reward players for driving accuracy (Acimovic & Fearing, 2011), however, the impact of this change on golf ball flight characteristics is not yet known.

The authors are with the Faculty of Health & Life Sciences, Northumbria University, Newcastle, UK.

Being able to impart spin on a golf ball from a fairway position is a key requirement to land shots close to the hole, ultimately increasing the chance of success. Subsequently, it is important to know how much of a reduction in spin, if any at all, there is between the old and new groove designs. The rule change does not just apply to elite tour professionals. The USGA and R&A are enforcing this change throughout the game so it will eventually apply to golfers at every level. The rule was first introduced into the professional game in 2010, changes will apply to all amateur professionals in 2014 and subsequently will apply to all remaining golfers by 2024 (R&A, 2010). Thus, it is essential to understand how this change might impact the professional game but also how it might affect golf in the future. Due to the timing of this rule change, there is currently a paucity of peer-reviewed literature on the topic. Opinions however, have been expressed extensively in other forms of media, particularly online.

We currently have an understanding of how surface roughness, ball hardiness and loft angle of a club affect the ability to produce backspin (Farrally et al., 2003). There are, however, elements within this process that are not fully understood and have not yet been tested to any great extent. Surprisingly, very limited research into the full functionality that grooves provide during golf shots and the role grooves play in contributing toward the production of backspin have been overlooked in previous studies (Cochran & Farrally, 1994; McCloy, Wallace, & Otto, 2006). The "old" pre 2010 U-grooves are larger and deeper in size compared with the "new" V design. U-grooves have sharp right angle edges and the greater overall volume of the groove filters debris and water away from the surface of the club very efficiently allowing for a clean, clear contact with the ball and the clubface. This allows the sharp edges of the grooves to grip the ball causing it to roll and generate a large amount of backspin, this make them very effective when playing a shot from the fairway or rough. The "new" post 2010 V -grooves are between 40–50% smaller in volume than the previously used U-grooves; the edges are rounded lessening their ability to grip the ball at contact thereby reducing the spin imparted. The depth of groove has also been reduced and is most commonly in a V shape, although square designs with curved edges are available (Figure 1). Sauerhaft (2010) has explained that the decrease in volume makes the new grooves less efficient at filtering away debris and moisture in the rough, leaving behind water and debris on the clubface at ball strike resulting in less spin. However, this is yet to be elucidated in a peer reviewed manner.

To our knowledge, peer reviewed literature is not available specifically regarding the rule change and golf shot performance. Thus, the aim of the current study was to assess the effect of the change in groove design on the backspin and accuracy of controlled golf shots played by experienced, low handicap golfers from the fairway and rough. It was hypothesized that shots taken with the post 2010 conforming V-grooves would reduce backspin and accuracy compared with shots played with the pre 2010 nonconforming U-grooves from both the fairway and rough.

Methods

Participants

Ten male golfers volunteered to participate in the study (mean ± *SD*, age, 23.0 ± 0.67 yr; playing experience, 13.2 ± 1.6 yr; handicap, 1.6 ± 1.4). All participants

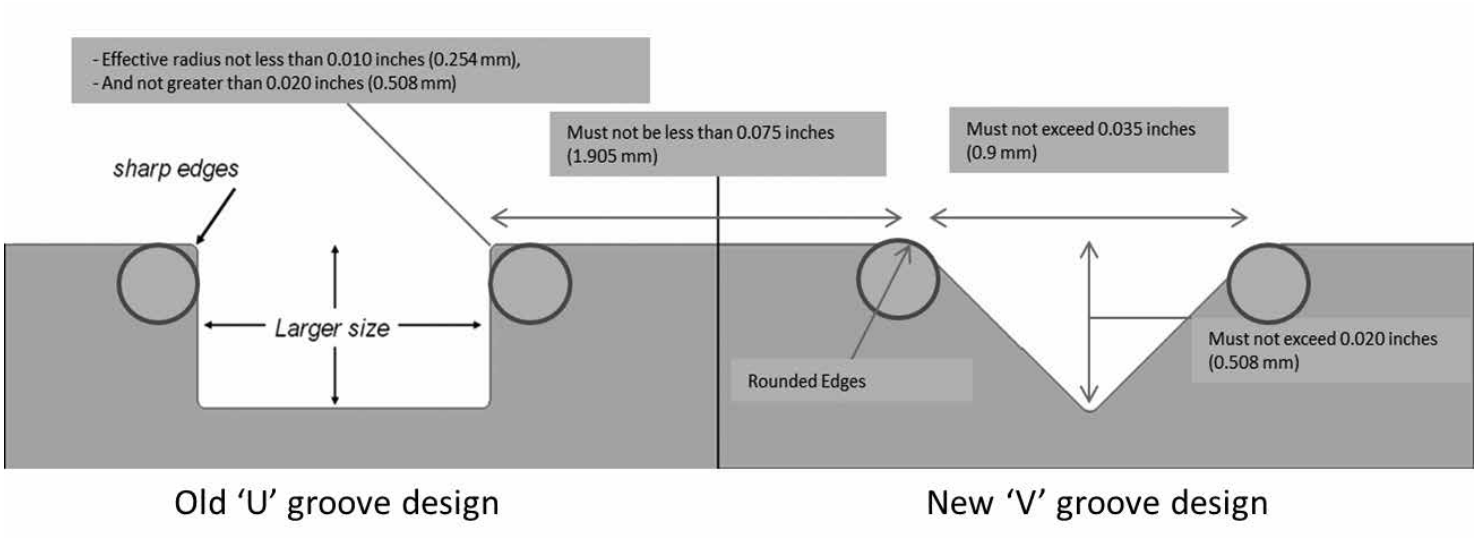

Figure 1 — Pre and Post-2010 groove specifications.

gave written, informed consent before the commencement of the study. Upon arrival to the laboratory, experimental procedures, associated risks and potential benefits of participation were explained. The study was approved by Northumbria University's School of Life Science Ethics Committee.

Experimental Design

The testing was carried out using an indoor golf simulator (Gold Simulator, Sports Coach System Ltd, Surrey, UK). Each testing session lasted 1–2 hours and before testing began, each participant was required to perform a warm up consisting of stretching, mobility exercises, rotation and 5 practice shots with each club. Each participant played 20 shots with 6 clubs (9 iron, PW and SW of "old" and "new" groove conformation); 10 shots were played from a fairway mat and 10 shots were played from a mat simulating rough grass. In total, 60 shots were played with the U-groove clubs and 60 shots were played with the V-groove clubs, thus, participants completed 120 shots. The order of the conformation and the club used was randomized and the same hole and pin position was set for each participant (Celtic Manor 18th). Conditions were set to fine; there was no wind and each shot was played at a set distance from the hole (9 iron, 120 yds; PW, 100 yds and SW, 80 yds). Participants were instructed to play the most accurate shot they could to land the ball as close to the hole as possible. From each shot, the amount of backspin (RPM) and, as a measure of accuracy, the distance landed from the pin (yds) was recorded.

Golf Club Design and Equipment. Specifically, dimensions of irons conforming to the rule change are: the width, spacing and cross-section of the grooves must be consistent throughout the impact area; the width of each groove must not exceed 0.035 inches (0.9 mm) using the 30 degree method of measurement on file with The R&A; the distance between edges of adjacent grooves must not be less than three times the width of the grooves, and not less than 0.075 inches (1.905 mm); the depth of each groove must not exceed 0.020 inches (0.508 mm); for clubs other than driving clubs, the cross-section of the groove divided by the groove width and distance between grooves must not exceed 0.0030 square inches per inch (0.0762 mm^2/mm); grooves must not have sharp edges or raised lips; for clubs with a loft angle greater than or equal to 25 degrees, groove edges must be substantially in the form of a round edge, having an effective radius which is not less than 0.010 inches (0.254 mm), and not greater than 0.020 inches (0.508 mm); deviations in effective radius within 0.001 inches (0.0254 mm) are permissible (Figure 1). The nonconforming U-groove clubs used were 2004 Callaway Big Bertha (Callaway Golf, CA, USA) and the conforming V-groove clubs used were 2010 Cleveland CG-16 (Cleveland Golf, CA, USA). Brand new sets of the same golf ball (Z-Star Srixon, Cleveland Golf, CA, USA) were used for each participant.

Golf Simulator. The simulator and associated software (Gold Simulator, Sports Coach System Ltd, Surrey, UK) consisted of a booth, a high spec computer and projector system. This golf simulator was used as it allows for control of many variables that have an impact on the generation of spin (i.e., wind, rain, wet and dry greens). This allowed for data to be collected in a valid and repeatable environment.

The golf simulator contained two high speed cameras set to track the ball and transmit data to the receiving computer. A side camera monitored the launch angle and speed of the ball, while the camera located above monitored direction and spin. The two high speed cameras worked simultaneously at separate 90° angles to create a 3D model of ball flight. Each camera used high quality CMOS sensors that were processed at 60 Hz. Images were produced on screen in front of the golfer via an XGA projector delivering 4500 lumens with a throw distance of between 1.5 m and 7 m and native 1024 × 768 display. The overhead camera tracked the ball from impact and informed the software that the ball had been hit. At the same time exact data relating to the horizontal launch angle, club speed, ball spin, swing path and face angle relative to the target line were determined. The lateral camera constantly tracked the golf ball from impact as it traveled toward the screen enabling accurate measurement of the vertical launch angle, ball speed and spin, determining the carry of the ball through the air.

Statistics

Data are presented as means ± *SD* within the text and displayed as means ± *SE* in the figures. Following verification of underlying assumptions, 2 × 2 ANOVA with repeated measures on groove type and surface was used to test for within group differences in spin rate and shot accuracy between pre 2010 U-grooves and post 2010 V-grooves, between fairway and rough and for interaction effects between groove type and surface. Significant main effects were further examined using Tukey simultaneous 95% confidence intervals to provide a plausible range for the true population mean differences. Data analysis was performed in Minitab (v16.2.2, Minitab Ltd, Coventry, UK) and significance was set at $p < .05$.

Results

Nine Iron Spin Rates

There were significant effects of groove ($F_1 = 195.65$, $p < .01$) and surface ($F_1 = 311.66$, $p < .01$) on spin rate and a significant groove by surface interaction ($F_1 = 4.42$, $p = .04$). Spin rates were higher from the fairway than the rough for both U-groove (9027 ± 130 vs. 8084 ± 222 RPM, 95% CI 757–1127 RPM) and V-groove (8259 ± 203 vs. 7518 ± 146 RPM, 95% CI 557–926 RPM) clubs. Spin rates were higher with the U-groove than V-groove clubs from the fairway (95% CI 582–952 RPM) and from the rough (95% CI 382–751 RPM). The loss of spin from fairway to rough did not differ between U-groove and V-groove clubs (95% CI 10 to −359 RPM) (Figure 2).

Nine Iron Accuracy

Both groove type ($F_1 = 18.99$, $p < .01$) and playing surface ($F_1 = 8.64$, $p < .01$) affected nine iron shot accuracy but there was no groove by surface interaction ($F_1 = 1.87$, $p = .183$). Regardless of playing surface, shots with the U-groove club were nearer to the target than shots taken with the V-Groove club (95% CI −1.26 to −0.45 yds). Regardless of groove type, shots from the rough landed further from the target than shots from fairway (95% CI 0.17–0.98 yds) (Table 1).

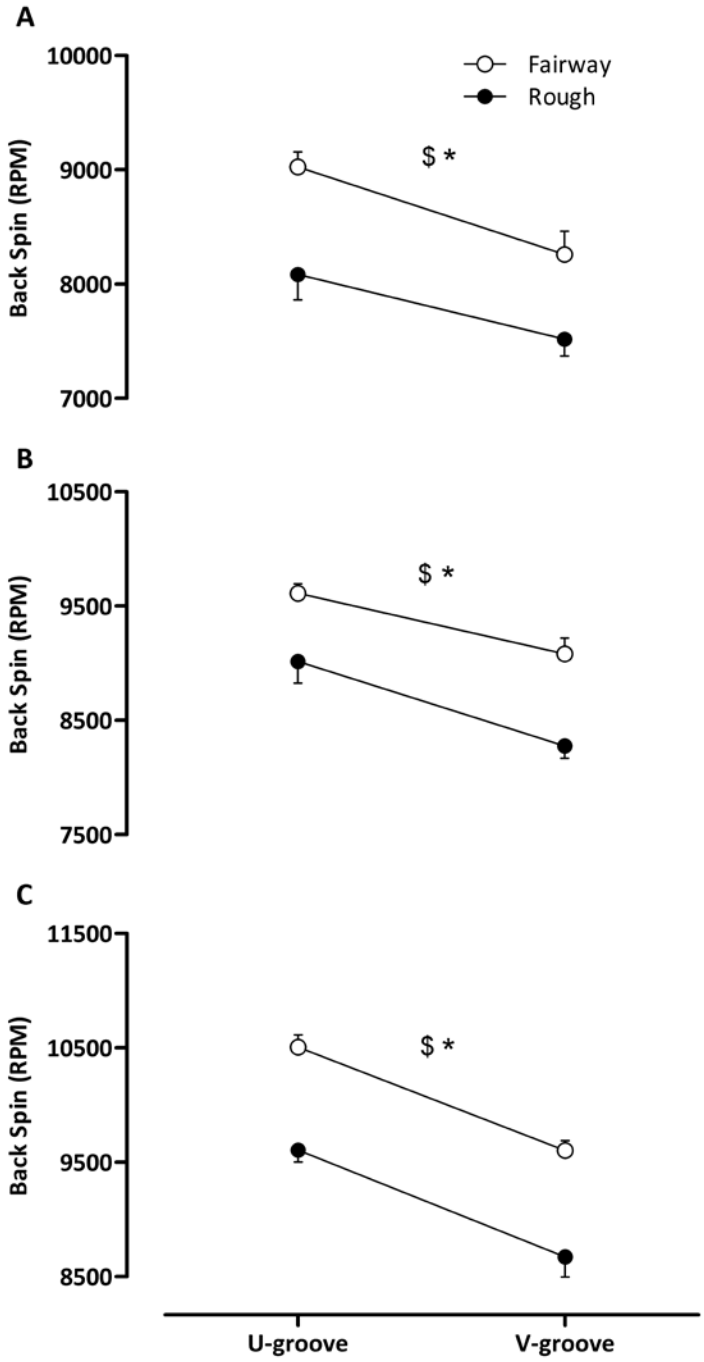

Figure 2 — The amount of backspin produced with shots taken from the fairway and rough using a 9 iron (A), PW (B) and SW (C) with the "old" U-groove (○) and the "new" V-groove (●) configurations. $ = $p < .05$ fairway vs. rough; * = $p < .05$ U-groove vs. V-groove.

Table 1 Average Distance (yds) Away From the Hole with "Old" U-Groove and "New" V-Groove Configured Clubs.

	U-Groove	V-Groove
Fairway		
9 iron	11.8 ± 1.1	12.9 ± 1.1
PW	10.8 ± 1.0	11.8 ± 1.0
SW	9.4 ± 0.7	11.0 ± 0.8
Rough		
9 iron	12.6 ± 0.5	13.2 ± 1.5
PW	11.7 ± 0.8	12.6 ± 1.5
SW	10.6 ± 0.9	11.6 ± 0.8

Values are means ± SD for 10 participants.

Pitching Wedge Spin Rates

Groove type ($F_1 = 241.84$, $p < .01$) and playing surface ($F_1 = 296.07$, $p < .01$) had a significant effect on spin rate and there was a significant groove by surface interaction ($F_1 = 6.59$, $p = .02$). Higher spin rates were evident from the fairway than from the rough for U-groove (9612 ± 85 vs. 9015 ± 188 RPM, 95% CI 438–754 RPM) and V-groove clubs (9082 ± 138 vs. 8277 ± 108 RPM, 95% CI 648–963 RPM). As with the nine iron, spin imparted to shots was higher with U-groove than V-groove clubs both from the fairway (95% CI 371–686 RPM) and the rough (95% CI 580–896 RPM). There was no difference between U-groove and V-groove clubs in the amount of spin lost from fairway to rough (95% CI 90 to -225 RPM) (Figure 2).

Pitching Wedge Accuracy

There were independent effects of groove type ($F_1 = 39.02$, $p < .01$) and playing surface ($F_1 = 34.10$, $p < .01$) on shot accuracy, but no interaction effect ($F_1 = 0.02$, $p = .89$). Shots played with the U-groove club landed closer to the target than those played with the V-groove club regardless of the playing surface (95% CI −1.22 to −0.62 yds). Shots played from the rough landed further from the target than shots played from the fairway regardless of groove configuration (95% CI 0.56–1.16 yds) (Table 1).

Sand Wedge Spin Rates

There were significant and independent effects of groove ($F_1 = 877.18$, $p < .01$) and playing surface ($F_1 = 872.38$, $p < .01$) on sand wedge spin rates, but no interaction between groove type and playing surface ($F_1 = 0.27$, $p = .60$). Higher spin was imparted by U-groove than V-groove clubs for both playing surfaces (95% CI 853–980 RPM) and spin was lower from the rough than the fairway for both groove configurations (95% CI −978 to −851 RPM) (Figure 2).

Sand Wedge Accuracy

Similarly to the nine iron and pitching wedge, there were independent effects of groove type ($F_1 = 42.19$, $p < .01$) and playing surface ($F_1 = 18.04$, $p < .01$) on the accuracy of shots played with the sand wedge, but no groove by playing surface interaction effect ($F_1 = 1.96$, $p = .17$). Again, the U-grooves resulted in shots less far from the target than the V-grooves regardless of playing surface (95% CI −1.71 to −0.89 yds) and shots from the rough landed further from the target than shots from the fairway regardless of groove type (95% CI 0.43–1.26 yds) (Table 1).

Discussion

The aim of the current study was to address the effect of the newly introduced regulations in golf club groove design enforced by the USGA and R&A in 2010. We examined whether the "new" post 2010 V-groove design reduces the amount of spin and accuracy during a controlled golf shot compared with the "old" pre 2010 U-groove design. Compared with the U-grooves, the newer V-groove design imparted significantly less backspin on shots both from the fairway and rough; additionally, shots with all 3 clubs were consistently less accurate. The newer groove design does not enable players to obtain as much control of the ball as they previously could, such that the recent regulatory change in golf club design might reward driving accuracy.

Peer reviewed work on this topic is sparse which makes comparison with previous literature difficult. The USGA and R&A, however, have released details of "in house" testing carried out using the U- and V-grooved clubs (USGA & R&A, 2006, 2007). Their findings correspond to our data, in that a reduction of backspin in shots played from the rough with V-grooved irons was reported. Our data add to these previous results by demonstrating a reduction in backspin with shots played from the fairway as well as the rough and examining the effect of this spin reduction on shot outcome. Another previous investigation that focused solely on the issue of the ban, found that the change in regulation did not produce any significant difference in terms of difficulty hitting from the rough (Acimovic & Fearing, 2011). Although our data oppose that of Acimovic & Fearing (2011) the research design adopted differs substantially. Acimovic & Fearing (2011) did not carry out any practical testing of the equipment; they assessed data from the PGA Tour over a 30-year period and specifically focused on two elements, has the rule change affected players driving accuracy and their ranking in the money list, and, have players visually changed their styles when in the rough. Whereas the current study obtained quantitative data and assessed the impact of the rule change on amateur professional's ability to generate spin. Collectively, our data oppose that of Acimovic & Fearing (2011); shots played from the rough with the new V-groove clubs were more difficult to control and less accurate.

Previous work by Cochran & Stobbs (1968) suggesting that clubface surface roughness does not influence backspin seems contrary to our data. Figure 2 demonstrates that even when clubs of the same loft are used, the amount of spin differs as a result of the amount of grip and friction caused which is in line with previous research (Chou, Liang, Yang, & Gobush, 1994). However, research exists

that would suggest our findings are a direct result of ball softness (Gobush, 1996; Monk, Davis, Otto, & Strangwood, 2005). These data would suggest that it is the softness of the golf ball that produces the difference in spin rate. However, soft shelled golf balls were not specifically used in the current study; a popular mid-range golf ball was used and, despite the precise composition not being known, the balls are not regarded as "soft".

To understand what happens upon impact of the clubface and golf ball, one must appreciate that what determines a ball's fate happens within half a millisecond. Thus, what happens in this small time frame is imperative to understanding how the clubface and ball interact (Cochran & Farrally, 1994). Johnson and Lieberman (1996) examined this interaction and found that when a golf ball makes contact with the club head, two things happen: sliding and rolling. The sliding and rolling occur due to friction; as the ball contacts the club it begins to climb up the clubface, such that the surface of the clubface determines whether the ball begins to roll or slide up the clubface. A golf ball that *rolls* up the clubface develops backspin; however, a golf ball that *slides* up the clubface drastically reduces the backspin imparted. Therefore, the extent that the surface of the clubface promotes rolling and prevents sliding, ultimately determines the generation of spin. This is where the grooves on the clubface make their contribution to the generation of spin (Johnson & Lieberman, 1996). Lieberman (1990) found that grooves do not just provide a form of friction to encourage the ball to roll, they essentially work like the tread on a tire. The grooves on a clubface are used to filter away water, grass and other debris away from the clubface so a clean contact and ultimately spin, can be imparted to the ball (Lieberman, 1990). Should water and debris not be filtered away, but instead be left between the ball and clubface at impact, the grooves will be prevented from gripping the ball, causing the ball to slide up the clubface reducing the amount of spin.

In addition, to the surface of the clubface it is also important to understand the aerodynamics of a spinning golf ball as it is launched into flight. Initially, with a stationary ball, airflow is slowed as it comes into contact with the front of a ball; airflow then increases as it moves around the ball and this increase in airflow causes low pressure (Smith, Beratlis, Balaras, Squires, & Tsunoda, 2010). Similarly, Smits & Smith (1994) found that when a ball is spinning airflow is slowed at the point of contact; due to airflow moving over the ball at a heightened pace compared with when stationary, a much lower pressure is caused above the ball and the airflow underneath the ball is slower creating high pressure. That high pressure will force the ball into the area of low pressure and lift is created (Bearman & Harvey, 1976). However, a golf ball will only lift once the high and low pressures overcome the weight of the ball; Aoki, Nakayama, Hayasida, Yamaguti & Sugiura (1999) identify that this is where "Bernoulli's Principle" becomes important. Bernoulli's principle states that spin rate and the pressure differential between the bottom and top of the ball are positively correlated. Thus, if the spin rate is high enough, pressures will be created that overcome the weight of the ball and lift will occur. This might, in part, explain why accuracy was reduced when shots were taken with the new V-groove clubs. The V-grooved clubs imparted a significantly lower spin rate and ultimately less lift; thereby a shallower trajectory and lack of backspin could not counteract the forward momentum of the shot when landing on the green.

There were a few unavoidable sources of error within this study. One of which was being unable to use a real grass surface to play shots from, a synthetic fairway and rough replacement mat had to be used which might limit the generalization of the results. Upon analysis of our findings and that of previous literature, it seems that one of the key influences upon backspin production is the skill level of the player. Elite amateur golfers notice a reduction in spin from the grooves, whereas elite professional golfers do not (Acimovic & Fearing, 2011; McFall, Todd & Treme, 2012). The rule change may have failed to affect current elite professionals due to their highly advanced skill level. In the future, the change may impact tour professionals by enforcing driving accuracy up through the amateur levels. However, there might be a way of combating this problem, it would seem that if the friction between the ball and clubface is compromised particularly by the rounded edges, players might be able to create more spin by using a softer golf ball to allow more chance of gripping, but in addition to the longevity of the golf ball, a sacrifice of distance would also be apparent.

Conclusion

In conclusion, the "new" post 2010 V-groove clubs imparted significantly less backspin compared with the "old" pre 2010 U-groove clubs on shots taken from the fairway and the rough. In addition, shots played with the V-grooved clubs landed consistently further from the pin, indicating a reduction in accuracy. Thus, the recent change in golf club design might reward accuracy from the tee.

References

Acimovic, J., & Fearing, D. (2011). A groovy kind of club: Examining the impact of new grooves rules on the PGA Tour. *MIT Sloan Sports Analytics Conference, 1*(1), 1-8.

Aoki, K., Nakayama, Y., Hayasida, T., Yamaguti, N., & Sugiura, M. (1999). Flying Characteristic and Flow Patterns on a Sphere with Dimples. In A.J. Cochran & M.J. Farrally (Eds.), *Science and Golf III* (pp. 445–456). London: E & F N Spoon.

Bearman, P.W., & Harvey, J.K. (1976). Golf ball aerodynamics. *Aeronautical Quarterly, 27*(May), 112–122.

Chou, P.C., Liang, D., Yang, J., & Gobush, W.Cochran, A.J., & Farrally, M.J. (Eds.). (1994). Contact forces, coefficient of restitution, and spin rate of golf ball impact. In A. J. Cochran & M. J. Farrally (Eds.), *Science and Golf II: Proceedings of the second world scientific congress of golf* (pp. 296 - 301). London: E & F N Spoon.

Cochran, A.J., & Farrally, M.R. (Eds.). (1994). *Science and Golf II*. London: E & FN Spon.

Cochran, A.J., & Stobbs, J. (Eds.). (1968). *The Search for the Perfect Swing: An Account of the Golf Society of Great Britain Scientific Study*. Portsmouth: Heinemann.

Farrally, M.R., Cochran, A.J., Crews, D.J., Hurdzan, M.J., Price, R.J., Snow, J.T., ... (2003). Golf science research at the beginning of the twenty-first century. *Journal of Sports Sciences, 21*(9), 753–765. PubMed doi:10.1080/0264041031000102123

Gobush, W. (1996). Friction coefficient of golf balls. *Engineering of Sport, 12,* 193–194.

Johnson, S.J., & Lieberman, B.B. (1996). *Normal Impact Models for Golf Balls.* Paper presented at the Proceedings of the 1st International Conference on the Engineering of Sport, Sheffield, UK.

Lieberman, B.B. (1990). The effect of impact conditions on golf ball spin rate. In A.J. Cochran (Ed.), *Science and Golf* (pp. 225–230). London: E & F N Spoon.

McCloy, A.J., Wallace, E.S., & Otto, S.R. (2006). Iron golf club striking characteristics for male elite golfers. *The Engineering of Sport, 6,* 353–358. doi:10.1007/978-0-387-45951-6_63

McFall, T., Todd, A., & Treme, J. (2012). 'Pandora's groove: Analysing the effect of the U- groove ban on PGA Tour golfers' performances and strategies'. *Applied Economics Letters, 19,* 763–768. doi:10.1080/13504851.2011.603684

Monk, S.A., Davis, C.L., Otto, S.R., & Strangwood, M. (2005). Material and surface effects on the spin and launch angle generated from a wedge/ball interaction in golf. *Sports Engineering, 8,* 3–11. doi:10.1007/BF02844127

R&A. (2010). Groove Guidance.

Sauerhaft, R. (2010). *Tested: New Grooves vs*. Old Grooves.

Smith, C.E., Beratlis, N., Balaras, E., Squires, K., & Tsunoda, M. (2010). Numerical investigation of the flow over a golf ball in the subcritical and supercritical regimes. *International Journal of Heat and Fluid Flow, 31*(3), 262–273. doi:10.1016/j.ijheatfluidflow.2010.01.002

Smits, A.J., & Smith, D.R.Cochran, A.J., & Farrally, M.J. (Eds.). (1994). A New Aerodynamic Model of a Golf Ball in Flight. In A. J. Cochran & M. J. Farrally (Eds.), *Science and Golf II: Proceedings of the second world scientific congress of golf* (pp. 341 - 347). London: E & F N Spoon.

USGA & R&A. (2006). *Interim Report on the study of Spin Generation*.

USGA & R&A. (2007). *Second Report on the Study of Spin Generation*.